6000 BALANCE COLLECTION DECORATIVE GRAB BARS

METICULOUSLY DESIGNED WITH THE USER IN MIND

sales@preferredbathinc.com
www.preferredbathinc.com

(336) 904-6248

P



100% STAINLESS STEEL CONSTRUCTION

- 304 STAINLESS STEEL BAR
- SOLID 304 STAINLESS STEEL DECORATIVE COVER FLANGES
- ADJUSTABLE MULTI-SCREW 304 STAINLESS STEEL MOUNTING BRACKETS
- PREMIUM STAINLESS STEEL MOUNTING HARDWARE


POLISHED TO PERFECTION


- STURDY SOLID CONSTRUCTION
- MEETS AND EXCEEDS ANSI REQUIREMENTS

EXCEEDS ADA & ANSI REQUIREMENTS



ART NUMBERS	FINISH
6012-BP	BRIGHT POLISHED
6016-BP	BRIGHT POLISHED
6018-вр	BRIGHT POLISHED
6024-BP	BRIGHT POLISHED
6030-вр	BRIGHT POLISHED
6036-вр	BRIGHT POLISHED
6042-вр	BRIGHT POLISHED
6048-вр	BRIGHT POLISHED
6012-ss	SATIN STAINLESS
6016-ss	SATIN STAINLESS
6018-ss	SATIN STAINLESS
6024-ss	SATIN STAINLESS
6030-ss	SATIN STAINLESS
6036-ss	SATIN STAINLESS
6042-ss	SATIN STAINLESS
6048-ss	SATIN STAINLESS

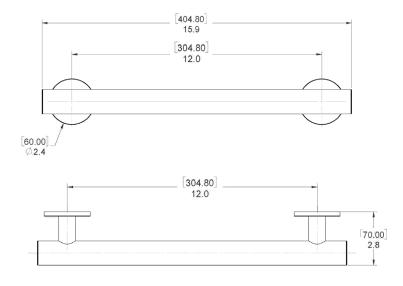



INSTALLATION:

Attach mounting bracket to the wall with the provided screws. Slide flange and grab bar over the wall bracket and secure with provided stainless steel set screws. This grab bar has been designed to be secured to the wall with at least two screws per mounting bracket giving you the strongest squared decorative grab bar on the market. It also has .20" of adjust-ability for an easy installation.


WOOD BLOCKING REQUIRED FOR COMMERCIAL APPLICATION

Limited Warranty:




THE STRONGEST MOST VERSATILE **MOUNTING SYSTEM ON THE MARKET**





www.preferredbathinc.com





BENEFITS AND FEATURES

MATERIAL COMPOSITION

SOLID INVESTMENT GRADE CAST 304 STAINLESS STEEL

KEY FEATURES

ONLY A SMALL 1/21 HOLE NEEDED TO USE THE SNAPTOGGLE® DRYWALL ANCHOR CAN BE USED WITH MULTIPLE ANCHORS OR SCREWS TOGETHER OR SEPARATE

VERSA MOUNTING BRACKET ™ | WOOD MOUNTED

METHOD ONE | ONE SCREW WOOD MOUNT

ONE STAINLESS STEEL MOUNTING SCREW USING THE CENTER MOUNTING HOLE

METHOD TWO | TWO SCREW WOOD MOUNT

TWO STAINLESS STEEL MOUNTING SCREWS USING ANY OF THE FOUR OUTSIDE MOUNTING HOLES SUPERIOR STRENGTH FOR GRAB BAR INSTALLATION





METHOD THREE | ONE SNAPTOGGLE® DRYWALL ANCHOR

ONE SNAPTOGGLE® DRYWALL ANCHOR USING THE CENTER MOUNTING HOLE

METHOD FOUR | TWO SNAPTOGGLE® DRYWALL ANCHORS

TWO SNAPTOGGLE® DRYWALL ANCHORS USING ANY OF THE FOUR OUTSIDE MOUNTING HOLES





METHOD FIVE | ONE SNAPTOGGLE® DRYWALL ANCHOR AND ONE SCREW WOOD MOUNT

ONE SNAPTOGGLE® DRYWALL ANCHOR CAN BE USED WITH ONE STAINLESS STEEL MOUNTING SCREW DRIVEN INTO A WALL STUD OR BLOCKING



